

### TECHNICAL FEATURES


Power supply:	From the C3000:24VAC - 50/60Hz
Protection:	IP55
Working Temperature:	0 -45°C
Relative Humidity max:	95% (without condensation)

### Inputs:

- 12 entradas de sector:12-24 V AC/DC
- Puerto de comunicaciones: RS485(connector 6 pins)

### Output:

- Communication port: RS485 (6 pins connector)

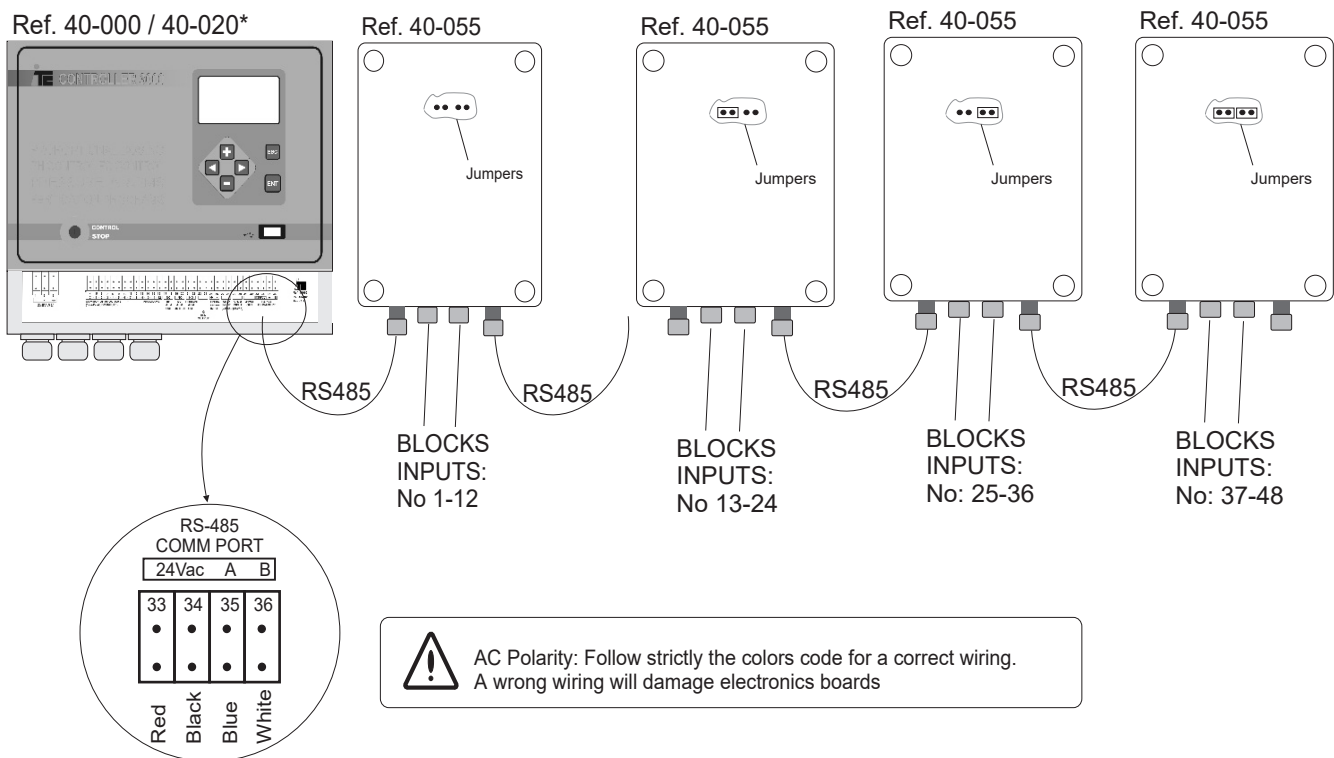

(\*)Ref. 40-020 (Controller 3000-6/12) has included the first 12 inputs corresponding to valves No. 1 to 12.

### DIMENSIONS

200x150x75

