


DOSTEC 40: VISCOSITY LIMITS (50Hz)

D40 010

Model	Flow 50 Hz		Config. Standard mPas	Config (6x12) mPas	Config. A (3/4") mPas	Config. B (3/4") mPas	Config. C (1"1/4) mPas
	l/h	GPH					
60-AP11-P24__L	2.5	0.7	50	200	+2000	-	-
60-AP13-P24__L	5	1.3	50	200	+2000	-	-
60-AP14-P24__L	9	2.3	50	200	+2000	-	-
60-AP33-P24__L	15	4	50	150	+2000	-	-
60-AP34-P24__L	25	6.6	50	100	+2000	-	-
60-AP53-P24__L	36	10	10	50	+2000	-	-
60-AP44-P24__L	50	13	10	50	1550	-	-
60-AP34-P34__M	50	13	50	-	-	+2000	-
60-AP53-P34__M	72	19	50	-	-	300	+2000
60-AP32-P61__M	75	20	50	-	-	300	+2000
60-AP44-P34__M	100	26	50	-	-	400	+2000
60-AP34-P49__M	100	26	50	-	-	400	+2000
60-AP54-P34__M	120	32	50	-	-	300	+2000
60-AP53-P49__M	144	38	50	-	-	200	+2000
60-AP34-P61__M	150	40	50	-	-	100	1700
60-AP44-P49__M	200	53	50	-	-	100	1850
60-AP54-P49__M	240	63	50	-	-	50	1550
60-AP34-P77__M	250	66	10	-	-	50	800
60-AP44-P61__M	300	79	20	-	-	50	500
60-AP54-P61__M	360	95	10	-	-	50	350
60-AP44-P77__M	500	132	10	-	-	50	250
60-AP54-P77__M	600	159	10	-	-	50	150

*Table values are based on the following conditions from the graphic below:
For high viscosity fluids it is recommended to choose a pump with a higher flow (20% aprox.)

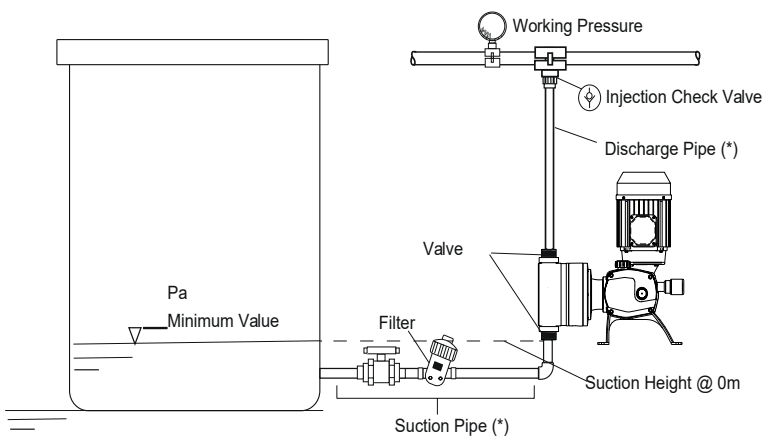


Configuration	Code	Pipe Diameter(*)
(6x12)	60-P-AILN-IILN	6mm
A (3/4")	60-P-AIMN-IIMC	16mm
B (3/4")	62-P-AIMN-IIMC	16mm
C (1"1/4)	62-P-AIXN-IIXC	30mm

DOSTEC 40: VISCOSITY LIMITS (50Hz)

D40 010

Model	Flow		Config. Standard mPas	Config (6x12) mPas	Config. A (3/4") mPas	Config. B (3/4") mPas	Config. C (1"1/4) mPas
	l/h	GPH					
60-AD11-D69__L	5.3	8	50	200	+2000	-	
60-AD21-D69__L	9.1	13	50	200	+2000	-	
60-AD31-D69__L	15.2	22	50	100	+2000	-	
60-AD41-D69__L	32	44	10	50	1900	-	
60-AD51-D69__L	38	53	10	50	1550	-	
60-AD33-D69__M	35	47	50	-	-	550	+2000
60-AD42-D69__M	57	77	50	-	-	650	+2000
60-AD32-D95__M	60	73	50	-	-	1300	+2000
60-AD43-D69__M	69	93	50	-	-	150	+2000
60-AD33-D95__M	72	87	50	-	-	900	+2000
60-AD51-D95__M	86	104	50	-	-	650	+2000
60-AD32-D115__M	105	119	50	-	-	400	+2000
60-AD42-D95__M	120	144	50	-	-	350	+2000
60-AD33-D115__M	126	143	50	-	-	300	+2000 +2000
60-AD43-D95__M	144	174	50	-	-	250	+2000
60-AD53-D95__M	173	209	50	-	-	200	+2000
60-AD42-D115__M	209	237	50	-	-	100	1950
60-AD43-D115__M	251	285	20	-	-	100	1700
60-AD53-D115__M	301	342	10	-	-	50	1350

*Table values are based on the following conditions from the graphic below:
For high viscosity fluids it is recommended to choose a pump with a higher flow (20% aprox.)

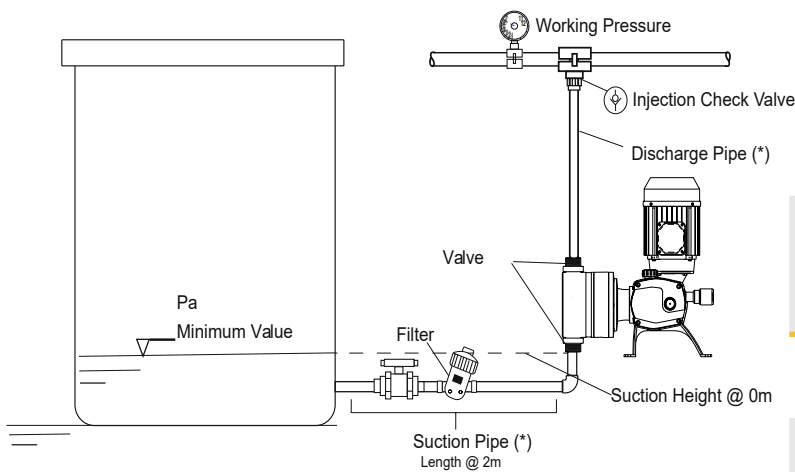

Configuration	Code	Pipe Diameter(*)
(6x12)	60-P-AILN-IILN	6mm
A (3/4")	60-P-AIMN-IIMC	16mm
B (3/4")	62-P-AIMN-IIMC	16mm
C (1"1/4)	62-P-AIXN-IIXC	30mm