

PERISTALTIC PUMP MP2 SPEEDY REDOX

Data
Sheet

DESCRIPTION

- ✓ Peristaltic pump with built in REDOX / ORP controller
- ✓ Suitable to dose oxidizing chemicals
- ✓ Easy Set Point programmable between 300 e 900 mV REDOX range
- ✓ Semi-automatic calibration with buffer 468 mV
- ✓ REDOX values showed on the display in real time
- ✓ Proportional dosing
- ✓ ON / OFF function
- ✓ Reinforced PP body
- ✓ Polycarbonate front panel
- ✓ IP 55 Protection Degree
- ✓ Standard Power Supply 230 Vac
- ✓ 100 % Made in Italy
- ✓ CE approved



OPTIONAL

- ✓ SCHUKO plug
- ✓ ON / OFF switch


	DESCRIPTION	
	Standard Material	Upon request
Standard Version		
Box	PP	-----
Rollers	DELRIN	-----
Tube	Santoprene	-----
Power Supply	230 V 50 – 60 Hz	-----
Consumption	35 Watt	-----
Net Weight	0,5 kg.	-----
Ring Nuts	PP 1/8"	-----
Fittings	PP 4 x 6 mm	-----
Probe connection	BNC	-----

PERISTALTIC PUMP MP2 SPEEDY REDOX

Data
Sheet

TECHNICAL SPECIFICATIONS

Standard	Max l/h	Pressure		Max cc / min	Santoprene tube	Box	Power [Watt]	RPM	Weight	
		Bar	PSI						kg.	Lbs
03 - 01	03	01	14,7	50	5,8 x 9,3	PP	35	10	0,5	1,2

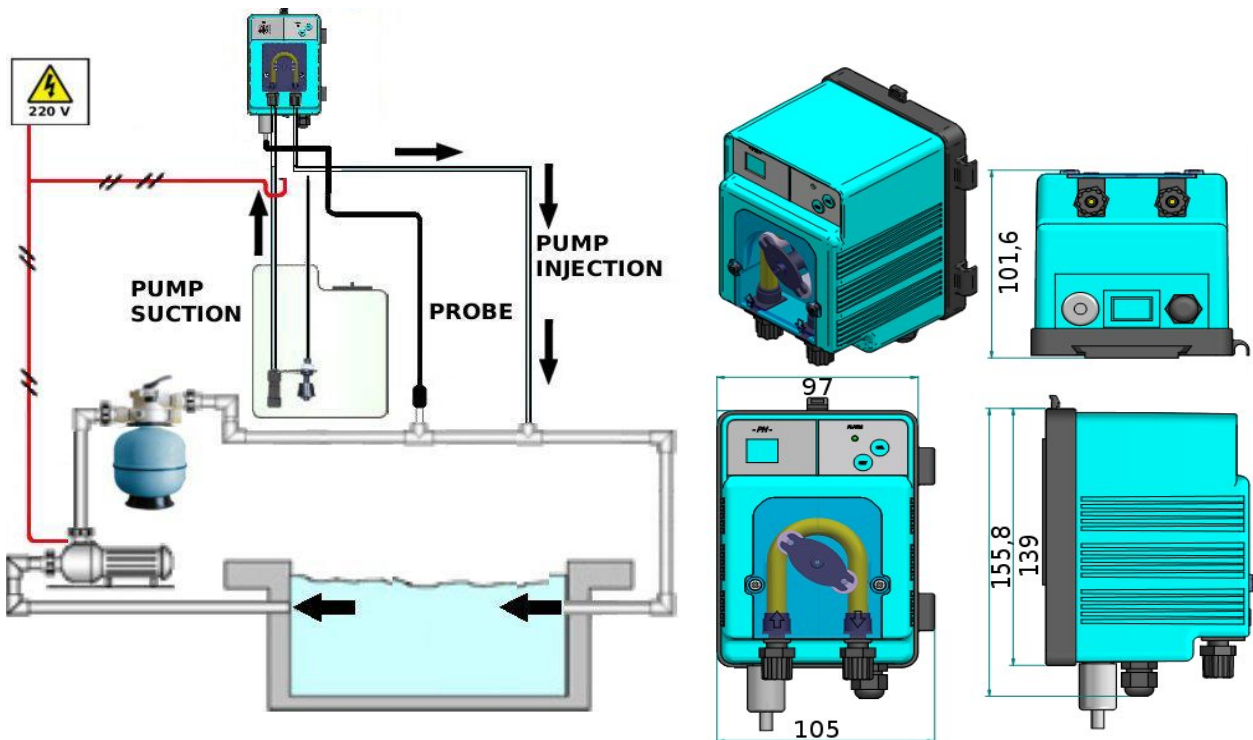

ACCESSORIES

STANDARD KIT				INSTALLATION KIT SOLD SEPARATELY			
INJECTION VALVE 1/2" PP-VL-VT	PP FOOT FILTER	2mt PE 4x6 DELIVERY TUBE	2mt PVC 4x6 SUCTION TUBE	REDOX electrode 3 mt. Cable epoxy body	REDOX buffer solutions 468 mV	Nr. 2 saddle clamps d.50 att. 1/2"	Probe holder 1/2" PP
