

# PERISTALTIC PUMP MP2-SUMMER PH

Data  
Sheet

## DESCRIPTION

- ✓ Peristaltic pump with built in PH controller
- ✓ Easy Set Point programming between 7,2 and 7,4 PH interval
- ✓ Semi automatic calibration with buffer 7,00 PH
- ✓ Proportional dosing according to Set Point
- ✓ ON / OFF function
- ✓ Reinforced PP body
- ✓ Polycarbonate front panel
- ✓ IP 55 Protection Degree
- ✓ Standard 230 Vac Power Supply
- ✓ 100 % Made in Italy
- ✓ CE approved



## OPTIONAL


- ✓ SCHUKO plug
- ✓ ON / OFF switch
- ✓ Level probe predisposition

DESCRIPTION		
	Standard Material	On request
<b>Standard Version</b>		
Box	PP	-----
Roller	DELTRIN	-----
Tube	Santopren	-----
Power supply	230 V 50 – 60 Hz	-----
Power consumption	35 Watt	-----
Net weight	0,5 kg.	-----
Ring Nuts	PP 1/8"	-----
Fittings	PP 4 x 6 mm	-----
Probe connection	BNC	-----

# PERISTALTIC PUMP MP2-SUMMER PH

Data  
Sheet

SPECIFICATIONS										
Standard	Max l/h	Pressure		Max cc / min	Santoprene tube	Box	Power [Watt]	RPM	Weight	
		Bar	PSI						kg.	Lbs
01-01	01	01	14,7	16,67	5,8 x 9,3	PP	35	10	0,5	1,2

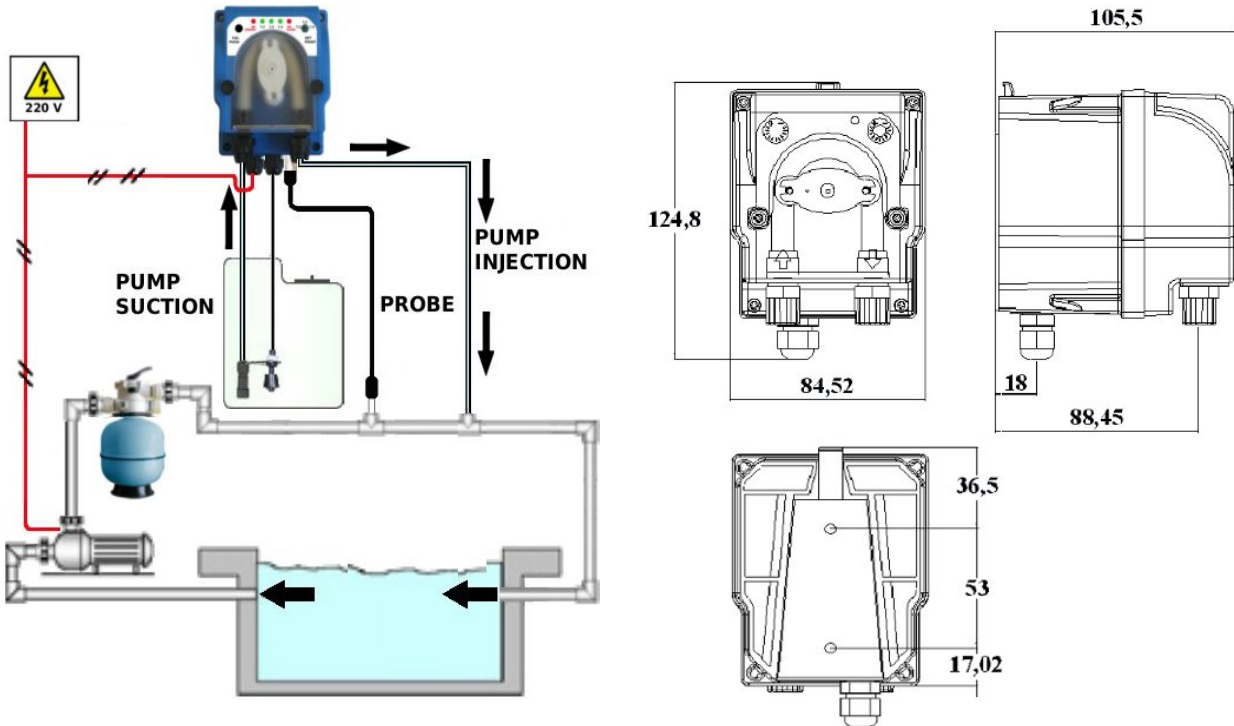

ACCESSORIES							
STANDARD KIT				INSTALLATION KIT SOLD SEPARATELY			
INJECTION VALVE 1/2" PP-VL-VT	PP FOOT FILTER	2mt PE 4x6 DELIVERY TUBE	2mt PVC 4x6 SUCTION TUBE	PH electrode 3 mt. Cable epoxy body	PH 7,00 buffer solutions	Nr. 2 saddle clamps d.50 att. 1/2"	Probe holder 1/2" PP
