

MODELS

- DOSITEC - MF: Multifunction (Manual flow regulation / proportional /Analogic 4-20mA)
- DOSITEC - PR: pH & ORP (Redox) control

DESCRIPTION

- 4 different languages menu: English, Spanish, French and Italian
- Flow rate visualisation in %
- Backlit digital display
- IP 65 protection
- CE approved



Standard options

Head/valves	PVDF
Balls	Pyrex®
Diaphragm	PTFE
Sealings	Viton®
Power Supply	230 Vac 50 Hz
Net Weight	3,4 kg


Accesories kit (included)

Foot filter	PP fittings 4 x 6 lip valve
Injection Valve	PVDF fittings 4 x 6 ball valve
Suction Tube	PVC 4 x 6
Delivery Tube	PE 4 x 6 (x2)


TECHNICAL SPECIFICATIONS

Flow l/h	Pressure Bar	C/min	Volum ml/cicle	Stroke length mm	Power supply Volts	Power Watts	Codes	
							MF	PR
2	18	150	0.22	1	230V AC	60 (0.25A)	59-046	59-033
5	10	150	0.55	1.1	230V AC	60 (0.25A)	59-044	59-034
8	8	150	1.11	1.3	230V AC	60 (0.25A)	59-045	59-035
20	3	150	2	1.9	230V AC	60 (0.25A)	59-100	59-101

FLOW - PRESSURE

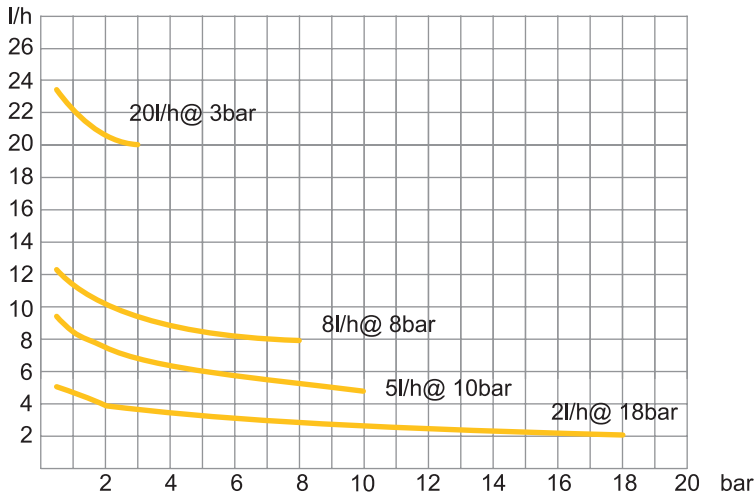

Models with automatic purge

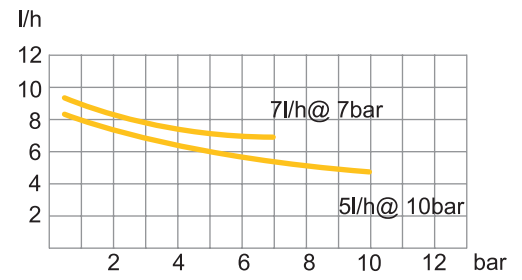

DIMENSIONS

